

MODEL

GC24698 系列**超高立柱式综合送料平缝机****Super post bed compound feed lockstitch sewing machine**

GC24698-1L

GC24698-1R

GC24698-BL


GC24698-BR

GC24698-2

GC24698-2B




GC24698-BL 超高立柱式综合送料平缝机



主要技术参数 Main technical specifications

型号 Model	最高缝速 Max sewing speed	缝台位置 Bed type	线迹长度 Stitch length	针杆行程 Needle bar stroke	压脚提升 Presser foot lift	压脚交互量 Presser foot alternation	机针 Needle size	针间距 Needle gauge	缝台高度 Heightness of post-bed	润滑方式 Lubrication	电动机 Motor
GC24698-1L	1600 r.p.m.	左缝台 Left-side stitching bed	0-6 mm	36 mm	手动 / 脚控 By hand / foot 8 / 15 mm	3-5 mm	DP × 17 17°-23°	○	450 mm	半自动润滑 Semi-auto lubricated	370 瓦缝纫机 专用电机 1400 转 / 分 370W Clutch motor 1400r.p.m.
GC24698-BL	1600 r.p.m.		0-7 mm	36 mm		3-5 mm	DP × 17 17°-23°	○	450 mm		
GC24698-1R	1600 r.p.m.	右缝台 Right-side stitching bed	0-6 mm	36 mm		3-5 mm	DP × 17 17°-23°	○	450 mm		
GC24698-BR	1600 r.p.m.		0-7 mm	36 mm		3-5 mm	DP × 17 17°-23°	○	450 mm		
GC24698-2	1600 r.p.m.	○	0-7 mm	36 mm		3-5 mm	DP × 17 17°-23°	8 mm	450 mm		
GC24698-2B	1600 r.p.m.	○	0-7 mm	36 mm		3-5 mm	DP × 17 17°-23°		450 mm		

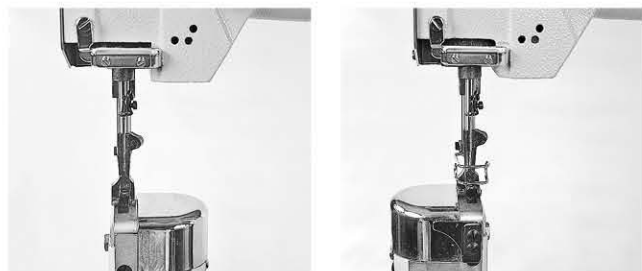

本系列机型是海菱高台机家族中的特高个。采用综合送料方式和超高立柱式缝台。根据缝制品的需要，分为单针左缝台(L)和单针右缝台(R)及双针机型。缝台采用特殊设计的针板，适用于缝制大型立体及小曲度的物品。针距调节，倒缝操作轻松简便，缝纫顺畅自如，线迹稳定美观。最适用于缝制皮靴，手提袋、帽子、假发、箱包类产品。

This model is designed with compound feed mechanism and super post bed. It is subclassed into left-side stitching bed (L) and right-side stitching bed (R) and twin needle requests. With special needle plate it is available for sewing large and cubic articles with small radius, such as boots, handbags, hats, perwigs, case & bag, and so on. And it features easy stitch regulation, easy reverse feeding, smooth sewing and beautiful stitches.